



Spectrum F202-BBBBBB-CC-DD-EE-FF

Explosion-Proof 2MP, 4MP, 6MP & 8MP (4K) Fixed Cameras

Key Features

- Excellent Image Quality 2MP, 4MP, 6MP & 8MP (4K)
- Pelco Smart Analytics inside
- Cloud-based AI Intelligence
- POE and Redundant DC Power
- 4G and 5G Wireless options available
- SFP Media Converter option available
- Rapid Installation Time with reduced costs
- Operating Temperature
 - See table on Page 2
- Front Glass Protective Film (F2XX-TO) included
- Reliable Securing Kit (SF-RSK) included
- Made in USA
- NDAA and TAA-Compliant
- cFmus, Class I/II/III, Division 1, Groups BCDEFG
II 2 G Ex db IIB+H2 Gb
II 2 D Ex tb IIIC Db,
- IECEx & ATEX approved
- 5 Year Warranty with Registration

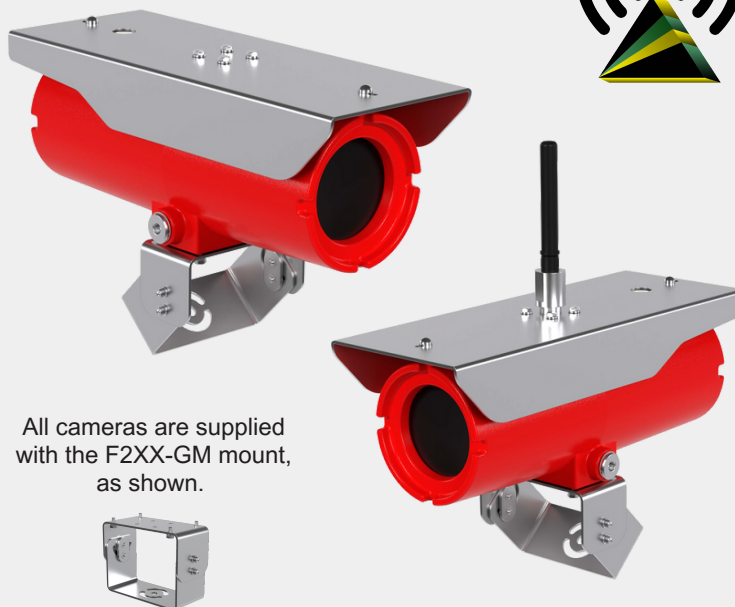

Pelco Camera Inside

PELCO



Part No.	Description	MP	F Number	i-CS Lens	Image Sensor
F202-SRXE4P-2-IBX-1-01-01	POE - IEEE 802.3bt - 90W	2.0	1.4	3.9 - 10mm	1 / 2.8
F202-SRXE4P-2-IBX-1-02-02	Media Converter (SFP) - 120 / 240 VAC - 50 / 60 Hz	2.0	1.4	3.9 - 10mm	1 / 2.8
F202-SRXE4P-2-IBX-1-02-03-02-RUT241	Wireless - Teltonika 4G - 120 / 240 VAC - 50 / 60 Hz	2.0	1.4	3.9 - 10mm	1 / 2.8
F202-SRXE4P-2-IBX-1-02-03-03-XR60	Wireless - Sierra 5G - 120 / 240 VAC - 50 / 60 Hz	2.0	1.4	3.9 - 10mm	1 / 2.8
F202-SRXE4P-4-IBX-1-01-01	POE - IEEE 802.3bt - 90W	4.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-4-IBX-1-02-02	Media Converter (SFP) - 120 / 240 VAC - 50 / 60 Hz	4.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-4-IBX-1-02-03-02-RUT241	Wireless - Teltonika 4G - 120 / 240 VAC - 50 / 60 Hz	4.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-4-IBX-1-02-03-03-XR60	Wireless - Sierra 5G - 120 / 240 VAC - 50 / 60 Hz	4.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-6-IBX-1-01-01	POE - IEEE 802.3bt - 90W	6.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-6-IBX-1-02-02	Media Converter (SFP) - 120 / 240 VAC - 50 / 60 Hz	6.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-6-IBX-1-02-03-02-RUT241	Wireless - Teltonika 4G - 120 / 240 VAC - 50 / 60 Hz	6.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-6-IBX-1-02-03-03-XR60	Wireless - Sierra 5G - 120 / 240 VAC - 50 / 60 Hz	6.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-8-IBX-1-01-01	POE - IEEE 802.3bt - 90W	8.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-8-IBX-1-02-02	Media Converter (SFP) - 120 / 240 VAC - 50 / 60 Hz	8.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-8-IBX-1-02-03-02-RUT241	Wireless - Teltonika 4G - 120 / 240 VAC - 50 / 60 Hz	8.0	1.3	3.9 - 10mm	1 / 1.8
F202-SRXE4P-8-IBX-1-02-03-03-XR60	Wireless - Sierra 5G - 120 / 240 VAC - 50 / 60 Hz	8.0	1.3	3.9 - 10mm	1 / 1.8

For other combinations and selection matrix data sheet please visit <https://spectrumcamera.com>

Specifications


General																																					
Casing	Aluminum																																				
Weight	27 - 29 lbs (12.2 - 13.2 kgs)																																				
Dimensions	19.25(L) x 7.41(H) x 6.64(W) in (498 x 188 x 163 mm)																																				
Power	See models shown on previous page, or on Selection Matrix Data Sheet																																				
Storage Conditions	-40°C to +60°C (-40°F to +140°F) Humidity 5-95% RH (non-condensing)																																				
Operating Conditions	<table><tr><th>Part No.</th><th>Certified Temperature °C (°F)</th><th>Part No.</th><th>Certified Temperature °C (°F)</th></tr><tr><td>F202-SRXE4P-2-IBX-1-01-01</td><td>-50 to +65°C (-58 to +149°F)</td><td>F202-SRXE4P-6-IBX-1-01-01</td><td>-50 to +65°C (-58 to +149°F)</td></tr><tr><td>F202-SRXE4P-2-IBX-1-02-02</td><td>-50 to +65°C (-58 to +149°F)</td><td>F202-SRXE4P-6-IBX-1-02-02</td><td>-50 to +65°C (-58 to +149°F)</td></tr><tr><td>F202-SRXE4P-2-IBX-1-02-03-02-RUT241</td><td>-40 to +65°C (-40 to +149°F)</td><td>F202-SRXE4P-6-IBX-1-02-03-02-RUT241</td><td>-40 to +65°C (-40 to +149°F)</td></tr><tr><td>F202-SRXE4P-2-IBX-1-02-03-03-XR60</td><td>-40 to +65°C (-40 to +149°F)</td><td>F202-SRXE4P-6-IBX-1-02-03-03-XR60</td><td>-40 to +65°C (-40 to +149°F)</td></tr><tr><td>F202-SRXE4P-4-IBX-1-01-01</td><td>-50 to +65°C (-58 to +149°F)</td><td>F202-SRXE4P-8-IBX-1-01-01</td><td>-50 to +65°C (-58 to +149°F)</td></tr><tr><td>F202-SRXE4P-4-IBX-1-02-02</td><td>-50 to +65°C (-58 to +149°F)</td><td>F202-SRXE4P-8-IBX-1-02-02</td><td>-50 to +65°C (-58 to +149°F)</td></tr><tr><td>F202-SRXE4P-4-IBX-1-02-03-02-RUT241</td><td>-40 to +65°C (-40 to +149°F)</td><td>F202-SRXE4P-8-IBX-1-02-03-02-RUT241</td><td>-40 to +65°C (-40 to +149°F)</td></tr><tr><td>F202-SRXE4P-4-IBX-1-02-03-03-XR60</td><td>-40 to +65°C (-40 to +149°F)</td><td>F202-SRXE4P-8-IBX-1-02-03-03-XR60</td><td>-40 to +65°C (-40 to +149°F)</td></tr></table>	Part No.	Certified Temperature °C (°F)	Part No.	Certified Temperature °C (°F)	F202-SRXE4P-2-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-6-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-2-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-6-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-2-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-6-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-2-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-6-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-4-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-8-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-4-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-8-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-4-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-8-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-4-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-8-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)
Part No.	Certified Temperature °C (°F)	Part No.	Certified Temperature °C (°F)																																		
F202-SRXE4P-2-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-6-IBX-1-01-01	-50 to +65°C (-58 to +149°F)																																		
F202-SRXE4P-2-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-6-IBX-1-02-02	-50 to +65°C (-58 to +149°F)																																		
F202-SRXE4P-2-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-6-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)																																		
F202-SRXE4P-2-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-6-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)																																		
F202-SRXE4P-4-IBX-1-01-01	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-8-IBX-1-01-01	-50 to +65°C (-58 to +149°F)																																		
F202-SRXE4P-4-IBX-1-02-02	-50 to +65°C (-58 to +149°F)	F202-SRXE4P-8-IBX-1-02-02	-50 to +65°C (-58 to +149°F)																																		
F202-SRXE4P-4-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-8-IBX-1-02-03-02-RUT241	-40 to +65°C (-40 to +149°F)																																		
F202-SRXE4P-4-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)	F202-SRXE4P-8-IBX-1-02-03-03-XR60	-40 to +65°C (-40 to +149°F)																																		
Approvals	Hazardous Area FM3600, FM3615, ANSI/ISA/EN/IEC/CAN/ CSA-C22.2 60079-0, ANSI/UL/EN/IEC/CAN/ CSA-C22.2 60079-1, ANSI/UL/IEC/CAN/ CSA-C22.2 60079-31 EMC EN 60032 Class A, EN 50121-4, IEC 62236-4, EN 60024, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A, ICES-003 Class A, VCCI Class A, RCM AS/NZS CISPR 32 Class A, KC KN32 Class A, KC KN35 Safety IEC/EN/UL 60950-22, IEC/EN/UL 62368-1, IS 13252 Environment IEC 60068-2-1, IEC 60068-2-2, IEC 600682-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK10, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9) Network NIST SP500-267																																				

Explosion-proof certification	USA: FM24US0209X Canada: FM24CA0056X ATEX: FM24ATEX0026X IECEX: IECEX_FMG_24.0028_000
-------------------------------	--

Accessories for the F200



F2XX-GM
General Mount
(Supplied with camera)



F2XX-TO
Front Glass
Protective Film
(Supplied with camera)



SF-RSK
Reliable
Securing Kit
(Supplied with camera)



F2XX-WM
Fixed Wall
Mount



F2XX-PM
Fixed Pole
Mount

Approvals & Dimensions

Non-Wireless Versions



MADE IN USA



SPECIALIZING IN EXPLOSION PROOF TECHNOLOGY
8935 ALMEDA GENOA RD. HOUSTON, TEXAS 77075 USA

SERIAL: _____

ENTRY DEVICE ENTRY US/Canada: Class I Division 1 Groups BCD [SEE TABLE 1], Type 4X, IP66

Class II/III Division 1 Groups EFG [SEE TABLE 2], Type 4X, IP66

Class I, Zone 1, AEx/Ex db IIB+H2 Gb [SEE TABLE 1], Type 4X, IP66

Zone 21, AEx/Ex tb IIIC Db [SEE TABLE 3], Type 4X, IP66

II 2 G Ex db IIB+H2 Gb [SEE TABLE 1] IP66

II 2 D Ex tb IIIC Db [SEE TABLE 1] IP66

CERT NO. FM24US0209X & FM24CA0060XIECEv FMG 24.0028X, & FM24ATEX0026X

WARNING: DO NOT OPEN WHEN ENERGIZED OR WHEN AN EXPLOSIVE ATMOSPHERE MAY BE PRESENT. Install seal within 18 inches.

WARNING: POTENTIAL ELECTROSTATIC CHARGING HAZARD - SEE INSTRUCTION NOTE. FOR BATTERY REPLACEMENT DETAILS- SEE INSTRUCTION

AVERTISSEMENT: NE PAS OUVRIR LORSQU'ENRGEISSE OU QUAND UNE ATMOSPHERE EXPLOSIVE PEUT ETRE PRESENTE. Les joints de fermeture

sont obligatoires dans une distance de 18 pouces.

AVERTISSEMENT - RISQUE DE CHARGE ELECTROSTATIQUE POTENTIEL - VOIR LES INSTRUCTIONS. REMARQUE: POUR LES DETAILS SUR LE

REMPACEMENT DE LA BATTERIE, VOIR LES INSTRUCTIONS

TABLE 1
"T" CODE
AMB TEMP RANGE
T6
-50°C TO +50°C
T5
-50°C TO +50°C
T4
-50°C TO +50°C
T3
-50°C TO +50°C
T2
-50°C TO +50°C
T1
-50°C TO +50°C
T0
-50°C TO +50°C

TABLE 2
"T" CODE
AMB TEMP RANGE
T6
-50°C TO +50°C
T5
-50°C TO +50°C
T4
-50°C TO +50°C
T3
-50°C TO +50°C
T2
-50°C TO +50°C
T1
-50°C TO +50°C
T0
-50°C TO +50°C

TABLE 3
"T" CODE
AMB TEMP RANGE
T6
-50°C TO +50°C
T5
-50°C TO +50°C
T4
-50°C TO +50°C
T3
-50°C TO +50°C
T2
-50°C TO +50°C
T1
-50°C TO +50°C
T0
-50°C TO +50°C

Wireless Versions



MADE IN USA



SPECIALIZING IN EXPLOSION PROOF TECHNOLOGY
8935 ALMEDA GENOA RD. HOUSTON, TEXAS 77075 USA

SERIAL: _____

ENTRY DEVICE ENTRY US/Canada: Class I Division 1 Groups BCD [SEE TABLE 1], Type 4X, IP66

Class II/III Division 1 Groups EFG [SEE TABLE 2], Type 4X, IP66

Class I, Zone 1, AEx/Ex db mb [ia Ga] IIB+H2 Gb [SEE TABLE 1], Type 4X, IP66

Zone 21, AEx/Ex mb tb [ia Da] IIIC Db [SEE TABLE 3], Type 4X, IP66

II 2 (1) G Ex db mb [ia Ga] IIB+H2 Gb [SEE TABLE 1] IP66

II 2 (1) D Ex mb tb [ia Da] IIIC Db [SEE TABLE 1] IP66

CERT NO. FM24US0209X & FM24CA0060XIECEv FMG 24.0028X, & FM24ATEX0026X

WARNING: DO NOT OPEN WHEN ENERGIZED OR WHEN AN EXPLOSIVE ATMOSPHERE MAY BE PRESENT. Install seal within 18 inches.

WARNING: POTENTIAL ELECTROSTATIC CHARGING HAZARD - SEE INSTRUCTION NOTE. FOR BATTERY REPLACEMENT DETAILS- SEE INSTRUCTION

AVERTISSEMENT: NE PAS OUVRIR LORSQU'ENRGEISSE OU QUAND UNE ATMOSPHERE EXPLOSIVE PEUT ETRE PRESENTE. Les joints de fermeture



sont obligatoires dans une distance de 18 pouces.

AVERTISSEMENT - RISQUE DE CHARGE ELECTROSTATIQUE POTENTIEL - VOIR LES INSTRUCTIONS. REMARQUE: POUR LES DETAILS SUR LE

REMPACEMENT DE LA BATTERIE, VOIR LES INSTRUCTIONS

TABLE 1
"T" CODE
AMB TEMP RANGE
T6
-50°C TO +50°C
T5
-50°C TO +50°C
T4
-50°C TO +50°C
T3
-50°C TO +50°C
T2
-50°C TO +50°C
T1
-50°C TO +50°C
T0
-50°C TO +50°C

TABLE 2
"T" CODE
AMB TEMP RANGE
T6
-50°C TO +50°C
T5
-50°C TO +50°C
T4
-50°C TO +50°C
T3
-50°C TO +50°C
T2
-50°C TO +50°C
T1
-50°C TO +50°C
T0
-50°C TO +50°C

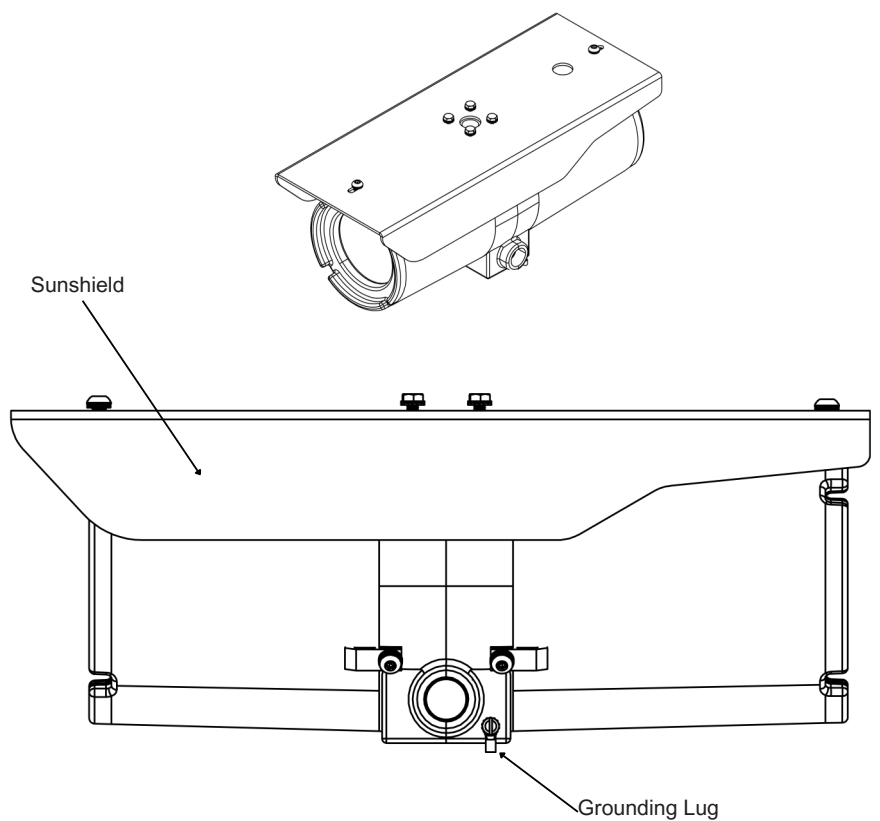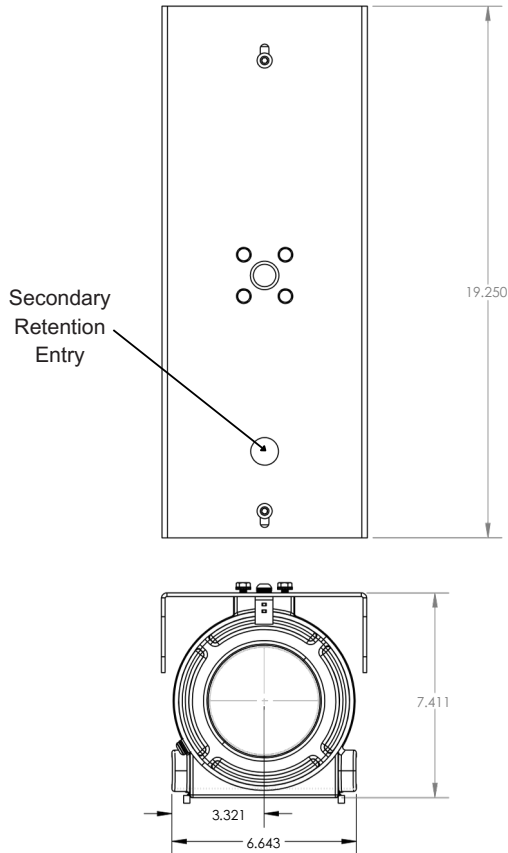

Installation Cable & Gland Kits

Suitable for installation in Class I, II, III, Div 1, ABCDEFG IEC - Zone 1/21 IIC, IIIC environments.

The cable gland is supplied pre-installed onto one end of the 3-core cable.



SCS-PWR-CBL-3C-D1-Z1-25 - (25 ft)
SCS-PWR-CBL-3C-D1-Z1-50 - (50 ft)
SCS-PWR-CBL-3C-D1-Z1-100 - (100 ft)
SCS-PWR-CBL-3C-D1-Z1-200 - (200 ft)
SCS-PWR-CBL-3C-D1-Z1-300 - (300 ft)

For additional sizes please contact us at
sales@spectrumcamera.com

For use with the 120 / 240 VAC
F200 models only